


4.11 The remote control RCC-01

As an option, a remote control can be connected to the XP-COMPACT. All operating controls and displays except from level adjustment are available on the remote control. The remote control is supplied with a 20m long cable. It can as long as 40m. The remote control is suitable for surface mounting on the wall or on to a switch board. It is fixed with 4 screws. The XP-COMPACT can also be programmed with the remote control. The programming is described in the section "Programming".

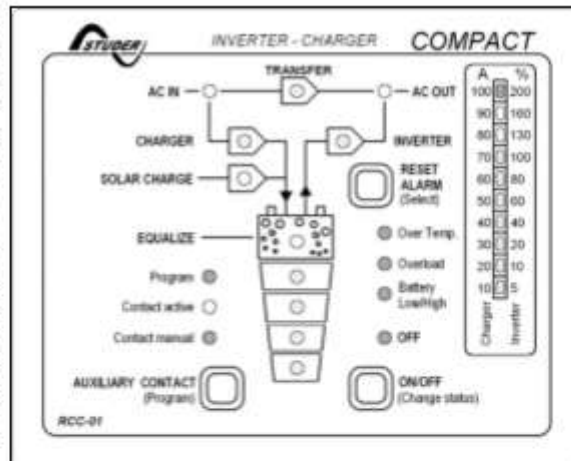

The output power and the charging currents are displayed on the remote control. In the remote control there is an additional alarm contact and a built-in control input. These two functions are available through Tip-jack RJ11/4 for use. This auxiliary contact is Front / Work contact (max. 0.5A!), which is independent from the auxiliary contact of the XP-COMPACT. This contact is active in case of an alarm of the XP-COMPACT. The Control Input is connected in parallel to the ON/OFF- push button. The XP-COMPACT can be switched on or off through this input with an impulse button or an impulse contact.

Caution: No external voltage should be connected to this input control.

Order number for remote control: RCC-01

Dimensions: H x B x T / 111.5 x 136.5 x 25mm

